

REYNOLDS[®]

PivotDUMP[®] Carry-All SCRAPER 18CS14



■ Efficient, self loading bucket design. Reinforced cutting blade support. Three piece Alloy Steel blade. Standard 48" center blade Stinger for hard soils.

■ Individually mounted wheels with (6) tires 17.5 x 25 16 PR for long service life. Strong carriage with hydraulic cylinder blocks for safe transport and service access.

■ Innovative hydraulic system and heavy duty cylinders designed for precision cuts and even spreading control. Detachable tongue for road transport.

"America's Preferred Scraper"

REYNOLDS[®]

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

PivotDUMP 18CS14 High Capacity CarryALL SCRAPER

Specifications subject to
change without notice

Specifications

■ **capacities** 18 yd³ (13.7 m³) heaped

14 yd³ (10.7 m³) struck

■ **bucket dimensions**

W 168" (4.26m), L 86" (2,18m),

H 45" (1,14m)


■ **transport dimensions**

W 187" (4,75m), L 268" (6,80m),

H 78" (1,98m), Clear. 14" (0,35m)

■ **tires** (6) tubeless construction

service 17.5 x 25 16PR

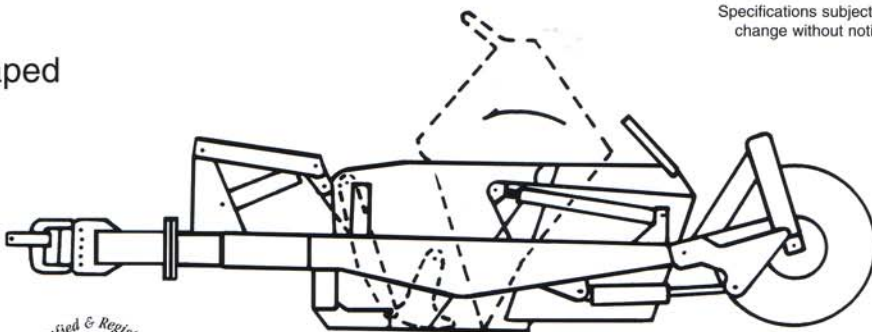

■ **shipping weight est.** 17,000 lb (7727 kg)

Standard Features

Height adjustable yoke hitch.

Tandem hydraulics and hitch.

Serrated protruding center blade.

Options

Laser receiver mount bracket.

(6) 17.5 25

Plain level cutting center blade.

Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

350-450 HP

1 Heavy Duty Cast Iron
Yoke with grease points.

2 Detachable Tongue for
ease of road transport.



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com