

REYNOLDS®

Straight Blade FINISHING Scrapers for LASER leveling fields, road beds, building and construction sites.



model	cutting width
GL-12	12' (3.65 m)
LS-14	14' (4.26 m)
LS-16	16' (4.87 m)
LS-18	18' (5.48 m)

production features

- skid shoe stabilizers for high speed leveling
- extended back and sides for extra soil capacity
- skid shoe adjustment
- YOKE type hitch option and detachable tongue assy.



"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

straight blade **Finishing Scrapers** for agricultural tractors from 80 to 220 HP

Specifications

model number	capacity approximate	width		wheels and tires	shipping weight	Price Quote
		cut	transport			
GL-12	4.0 cu. yd. (3.0 m ³)	12' (3.65 m)	12'-1" (3.68 m)	(4) four 11L x 16	3,800 lb (1,750 Kg)	
LS-14	7.0 cu. yd. (5.3 m ³)	14' (4.26 m)	14'-1" (4.29 m)	(4) four 11L x 16	5,200 lb (2,370 Kg)	
LS-16	8.0 cu. yd. (6.1 m ³)	16' (4.87 m)	16'-1" (4.90 m)	(4) four 11L x 16	5,600 lb (2,550 Kg)	
LS-18	9.0 cu. yd. (6.8 m ³)	18' (5.48 m)	18'-1" (5.51 m)	(4) four 11L x 16	6,000 lb (2,730 Kg)	

Options

Laser receiver platform
Drawbar and yoke hitch.



Tractor requirements


■ **hydraulics** single double acting circuit 15 GPM (60 liters/min) at 1750 PSI (120 bar)

■ **engine POWER range**

GL-12	80-120 HP
LS-14	160-180 HP
LS-16	180-200 HP
LS-18	200-220 HP



Specifications subject to change without notice

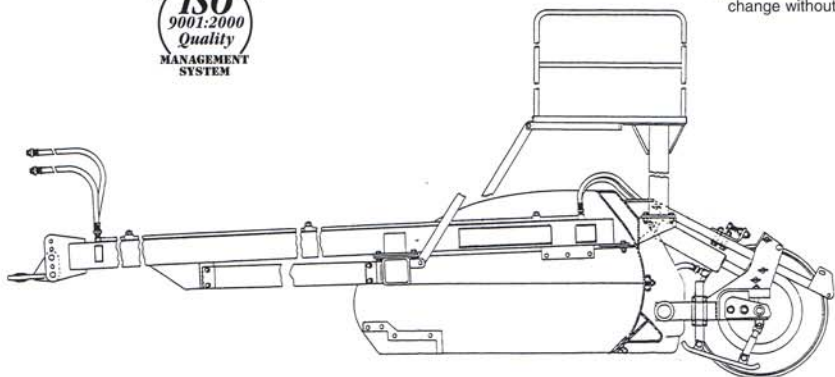

REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com