

REYNOLDS®

®



model 10C7 CARRY-ALL Scraper
7 ft (2.13 m) cut width

10 yd³ (7.6 m³) heaped capacity
7.5 yd³ (5.7 m³) struck capacity

earthmoving with agricultural tractors:

fast loading

■ Low and deep profile bucket design with proper cutting blade angle reduces fuel consumption and tractor HP requirements.

economical

■ Self-sharpening, high carbon reversible cutting blades and wear resistant bolt-on side bits are readily available.

laser leveling

■ Innovative hydraulic controls and heavy duty cylinders are designed for laser precision cuts and fast spreading operation.

"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

MODEL 10 C7 10 yd³ CARRY-ALL SCRAPER

Specifications

■ **capacities** 10 yd³ (7.6 m³) heaped

7.5 yd³ (5.7 m³) struck

■ **bucket dimensions**

W 84" (2.13m), L 96" (2.44m),

H 45" (1.14m)


■ **transport dimensions**

W 103" (2.62m), L 255" (6.48m),

H 70" (1.78m), Clear. 13" (0.33m)

■ **hydraulic cylinder/dia.**

Gate 5", Bucket 3", Frame 5"

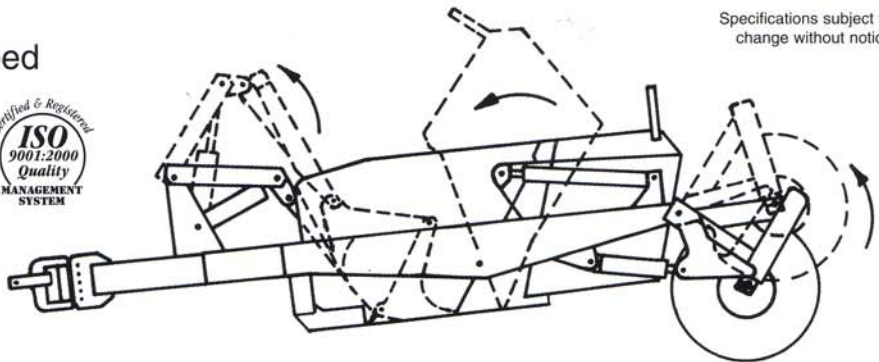

Specifications subject to
change without notice

■ **tires** on rims 24.00 x 9.00

■ **shipping weight est.**

(4) tubeless grader 13.00x24 8,000 lb (3640 kg)

Features

Height adjustable yoke hitch.

Greasable roller bearings.

Tandem hydraulics and hitch.

Blade centered "Frost Bit".

Options

Laser receiver mount bracket.

Drawbar assy. for the tractor.



Adjustable yoke hitch



Center
Frost Bit

Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)

at 2500 PSI (175 bar)

■ **engine HP range**

150-200 HP



Individual hubs

REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, Email: info@reynoldsinternational.com