

REYNOLDS®

10 Foot Cut SCRAPERS

with road transport width under 12 feet (3,50m)

model	heaped capacities
-------	-------------------

12C10	12.0 yd³ (9,1 m ³)
--------------	---

14CS10	14.0 yd³ (10,7 m ³)
---------------	--

16CS10	16.0 yd³ (12,2 m ³)
---------------	--



model 16CS10

Carry-All Scrapers for 180 to 400 HP Tractors

economical:

■ Heavy Duty scrapers are self-loading to excavate, transport and spread material with COST EFFECTIVE and versatile agricultural tractors.

earthmoving:

■ Loading is made easier with a serrated center STINGER, or a reversible EVEN center blade for LASER controlled level cut and fill operations.

operation:

■ Reliable hydraulic controls with fail-safe gate opening sequence valve. Tandem hitch lowers the rear scraper automatically when front unit is raised.

"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

10 Foot Cut SCRAPERS

with road transport width under 12 feet (3,50m)

Specifications model number	capacity		width		tires	shipping
	heaped	struck	cutting	transp.	(4)	weight
12C10	12.0 yd³ (9,1 m ³)	8.6.0 yd³ (6,5 m ³)	120" (3,05 m)	137" (3,48 m)	17.5x25	12,500 lb (5682 Kg)
14CS10	14.0 yd³ (10,7 m ³)	10.7 yd³ (8,1 m ³)	120" (3,05 m)	137" (3,48 m)	20.5x25	15,840 lb (6182 Kg)
16CS10	16.0 yd³ (12,2 m ³)	12.0 yd³ (9,1 m ³)	120" (3,05 m)	137" (3,48 m)	20.5x25	17,000 lb (7727 Kg)


Standard Features

Three piece cutting blade with serrated center STINGER on models 14CS10 and 16CS10.

Tandem hydraulics and hitch.

Options

Laser receiver mount bracket.
Drawbar assy. for the tractor.

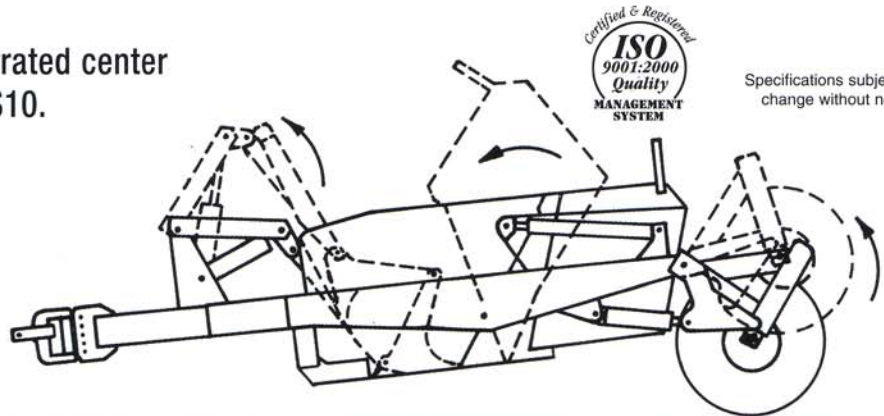

Specifications subject to change without notice

Tractor requirements


■ **hydraulics** 25 GPM (100 l/min)
at 2500 PSI (175 bar) optimum

■ **engine HP range**

model

12C10	180-300 HP
14CS10	250-300 HP
16CS10	300-400 HP

Quick Hitch

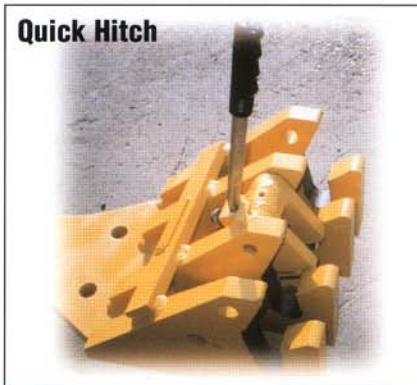

Serrated Center Blade



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, Email: info@reynoldsinternational.com