

# REYNOLDS®

**13 cu. Yard (9,9m<sup>3</sup>) Ejector. SCRAPER model 13E12**



## **12 ft. (3.65m) wide cut for LASER FINISHING**

### **“Ejector Scraper”**

for LASER Land forming, precision leveling large fields, and building sites with your Ag tractors from 200 to 300 HP.

### **“Synchronized ejector”**

Cylinders, priority apron opening system, replaceable flat ejector guide rails, and steel rollers. Patented SDS® system.

### **“Hydraulic System”**

Manifold with integral valves control all scraper functions. Flare type fittings to reduce leaks. Covers protect lines. Easy service access.

**“America’s Preferred Scraper”**

# REYNOLDS®

**REYNOLDS INTERNATIONAL EQUIPMENT, L.P.**  
P.O. Box 550, McAllen, Texas 78505-0550 USA  
[www.reynoldsinternational.com](http://www.reynoldsinternational.com)



# REYNOLDS

## LASER Ejector. **SCRAPER** wide cut model 13E12

Specifications subject to  
change without notice

### Specifications

#### ■ capacities

13 yd<sup>3</sup> (9.9 m<sup>3</sup>) heaped

11.5 yd<sup>3</sup> (8.8 m<sup>3</sup>) struck


#### ■ width

144" (3.65 m) cutting

161" (4.10 m) transp.

#### ■ tires

(4) 23.5x25

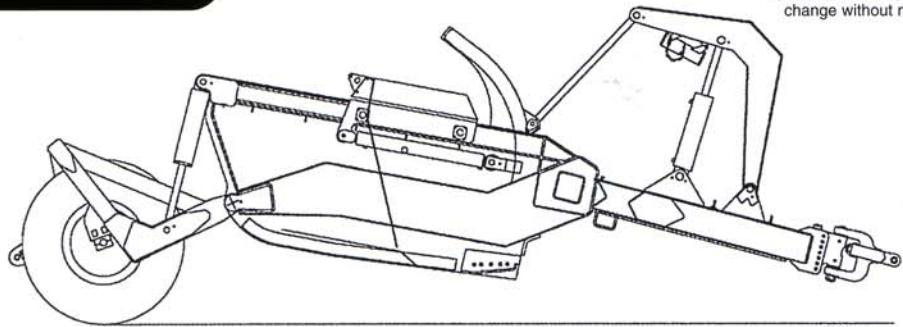

#### ■ shipping weight est.

21,800 lb (7,045 kg)



### Features

- Multi-function hydraulic valve block.
- Ejector roller bearings.
- Tandem quick hitch and hydraulics.
- Cylinder safety stops.
- Adjustable yoke hitch.
- Reversible heat treated alloy blades.
- Wear resistant corner bits.
- Height adjustable axle mounts.
- Heavy duty roller bearing hubs.
- Laser bracket.

### Options

- Tractor drawbars.
- Skid shoes.
- Center frost bit.



### Tractor requirements

#### ■ hydraulics

two double acting circuits  
optimum 25 GPM (100 l/min)  
at 2500 PSI (175 bar)

#### ■ engine HP range

200 - 300 HP



**REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA**  
Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com