

REYNOLDS®

PivotDUMP® "CFB" (fixed blade) SCRAPERS (2) Models for Farmers & Contractors



Ideal for precision land forming and maintenance of field irrigation and drainage efficiency with a single scraper model.

models and heaped capacity

12 CFB 12 yd³ (9.1 m³)
15 CFB 15 yd³ (11.4 m³)



"CFB", Carry-All Fixed Blade scrapers offer you earth moving productivity combined with GPS LASER finishing capacity in one scraper unit.

The Cutting blade is mounted on the scraper frame in a fixed position and hinged to the bucket floor, thus, pivoting the bucket does not affect cutting or spreading height.

REYNOLDS®

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS®

PivotDUMP® CFB (fixed blade) SCRAPERS


Specifications model	capacity		width		wheels	shipping	Price Quote
	heaped	struck	cutting	transp.	tires	weight	
12 CFB	12 yd ³ (9.1 m ³)	8.6 yd ³ (6.5 m ³)	144" (3.65 m)	163" (4.14 m)	4	13.000 lb (5.900 Kg)	
15 CFB	15 yd ³ (11.4 m ³)	10.5 yd ³ (8.0 m ³)	168" (4.26 m)	187" (4.75 m)	6	14.200 lb (6.450 Kg)	

Standard Features

Height adjustable yoke hitch.
Tandem hydraulics and hitch.
Tires 17.5 x 25 (L2) 16 PR.

Options

Center frost bit.
Laser receiver mount bracket.
Drawbar assy. for the tractor.

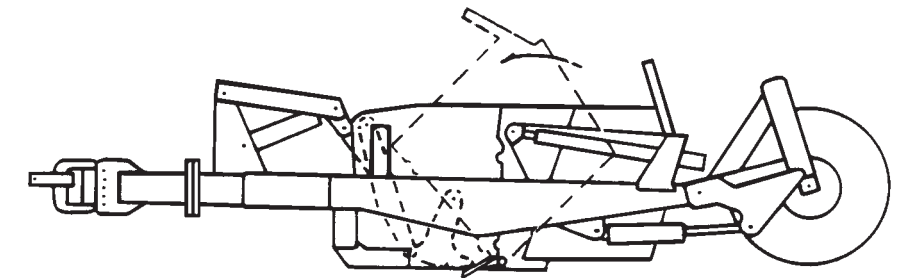

Specifications subject to change without notice

Tractor requirements

- hydraulics 25 GPM (100 l/min) at 2500 PSI (175 bar) optimum
- engine HP range

model	single	tandem
12 CFB	175-200	200-250
15 CFB	250-300	300-350



REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: earthmove@aol.com