

REYNOLDS[®]

PivotDUMP

SCRAPER model 17C12

17 yd³ (13 m³), 12 ft (3.65 m) cut



superior earth moving economics:

productivity

■ Easy to load deep bucket design with frost bit on cutting blade to reduce fuel consumption and tractor HP requirements.

service life

■ Self-sharpening, reversible cutting blade. Individually mounted wheels with (4) radial or (6) road grader tires.

precision cuts

■ Innovative hydraulic controls and heavy duty cylinders are designed for GPS/Laser cuts and fast spreading operation.

REYNOLDS[®]

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

PivotDUMP[®] 17C12 SCRAPER

Specifications

■ **capacities** 17 yd³ (13 m³) heaped
13 yd³ (10 m³) struck

■ **bucket dimensions**


W 144" (3.65m), L 96" (2.44m),
H 45" (1.14m)

■ **transport dimensions**

W 163" (4.14m), L 266" (6.75m),
H 81" (2.06m), Clear. 13" (0.33m)

■ **tires**

(4) radial tires 20.5R25 VUT

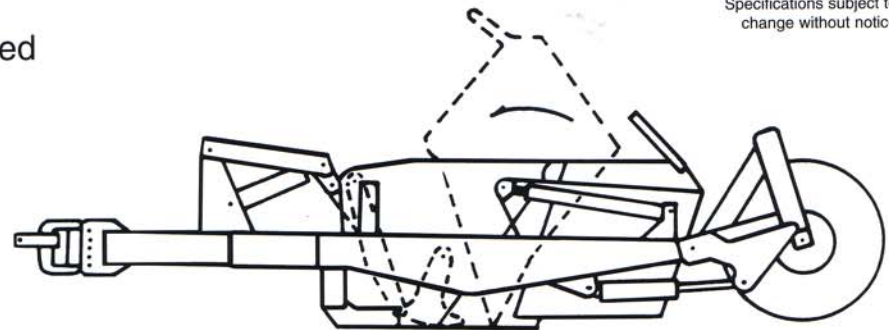

Specifications subject to
change without notice

■ **shipping weight est.**

17,000 lb (7710 kg)

Features

Height adjustable yoke hitch.
Tandem hydraulics and hitch.

Options

(6) Road Grader tires 13.00-24.
Laser receiver mount bracket.
Gooseneck tongue / dolly assy.
Drawbar assy. for the tractor.



Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)
at 2500 PSI (175 bar)

■ **engine HP range**

| | |
|-----------------|------------|
| one scraper: | 250-300 HP |
| two scrapers: | 300-350 HP |
| three scrapers: | 350-400 HP |



REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: earthmove@aol.com