

REYNOLDS®

FAST LOADING **PivotDUMP Carry-All SCRAPER 18CMX12.5**



**High capacity 18 yd³ (13,7 m³) model
loads 36 yd³ (27,4 m³) in Tandem**

■ Efficient, self loading bucket design. Reinforced cutting blade support. Three piece Boron Alloy Steel blade. Standard serrated/plain side reversible Stinger blade.

■ Individually mounted wheels, 4 20.5 x 25 tires with long service life. Strong carriage with hydraulic cylinder blocks for safe transport and service access.

■ Innovative hydraulic system and heavy duty 7" diameter cylinders designed for laser precision cuts and even spreading control. Plated steel tubing with flare fittings.

"America's Preferred Scraper"

REYNOLDS®

REYNOLDS INTERNATIONAL EQUIPMENT, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS

PivotDUMP 18 CMX 12.5 High Capacity Carry-ALL Scraper

Specifications

■ **capacities** 18 yd³ (13.7 m³) heaped
13 yd³ (10 m³) struck

■ **bucket dimensions**

W 150" (3.81m), L 91" (2.31m),
H 46" (1.16m)

■ **transport dimensions**


W 168" (4.26m), L 320" (8.12m),
H 90" (2.28m), Clear. 16" (0.41m)

■ **radial tires** (4) 20.5 x 25

VUT



Specifications subject to
change without notice

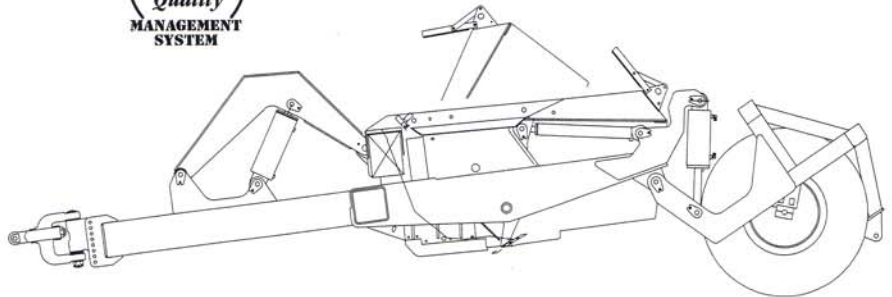

■ **shipping weight est.** 21,300 lb (9682 kg)

Standard Features

Height adjustable yoke hitch.
Tandem hydraulics and hitch.
Extended STINGER center blade.

Options

Laser receiver mount bracket.
Drawbar assy. for the tractor.
Even cut center blade.



Tractor requirements

■ **hydraulics**

optimum 25 GPM (100 l/min)
at 2500 PSI (175 bar)

■ **engine HP range**

350-450 HP



REYNOLDS INTERNATIONAL EQUIPMENT, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA
Tel. (956) 687-7500, Fax (956) 687-3082, E mail: info@reynoldsinternational.com