

REYNOLDS



Model 5C7

PivotDUMP

CarryALL SCRAPERS models 5C7 & 5CH7

Capacities: 5 yd³ (3.8 m³) heaped
3.9 yd³ (3.0 m³) struck
7 ft (2.13 m) cut width



Model 5C7

**economical scraper
for 60 to 80HP tractors
offers easy loading
and fast cycles**

■ Option of wheel carriage with either Spring loaded return (5C7) or with hydraulic cylinders (5CH7) for GPS/Laser controlled grading.

■ Innovative hydraulic controls and heavy duty cylinders are designed for precision cuts and fast spreading operation.

■ Self-sharpening, high carbon steel reversible cutting blade. (2) two side mounted implement tires 11L x 16.

REYNOLDS

REYNOLDS INTERNATIONAL, L.P.
P.O. Box 550, McAllen, Texas 78505-0550 USA
www.reynoldsinternational.com

REYNOLDS


PivotDUMP 5 YD³

CarryALL SCRAPERS 5C7 & 5CH7

Specifications subject to change without notice

Specifications

- **capacities** 5 yd³ (3.8 m³) heaped
3.9 yd³ (3.0 m³) struck
- **transport dimensions**
W 97" (2.46m), L 176" (4.47m),
H 45" (1.14m), Clear. 10" (0.25m)
- **tires**
(2) implement 11L x 16
- **shipping weight est.**
2,800 lb (1272 kg)

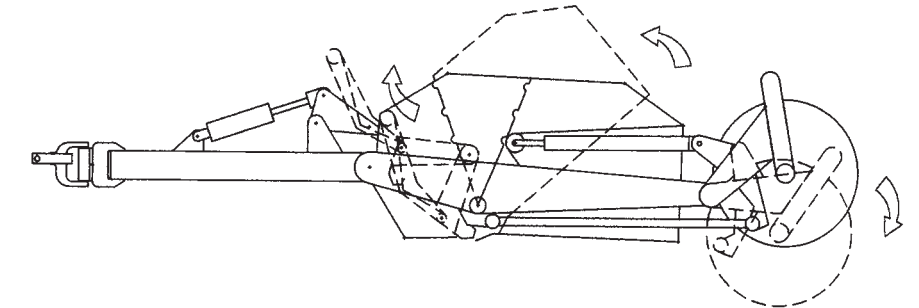

Model 5C7

Features

Height adjustable hitch.
Greaseable roller bearings.
5C: spring assist carriage
5CH: hydraulic cyl. carriage

Options

Laser mount bracket (5CH).
Swivel or yoke type hitch.



Model 5CH7 w/laser receiver mount bracket

Tractor requirements

- **hydraulics**
Two double acting circuits
optimum 15 GPM (60 l/min)
at 2500 PSI (175 bar)
- **engine HP range**
one scraper: 60-100 HP



Rear: Model 5CH7, Front: Model 6C6

REYNOLDS INTERNATIONAL, L.P., P.O. Box 550, McAllen, Texas 78505-0550 USA

Tel. (956) 687-7500, Fax (956) 687-3082, E mail: earthmove@aol.com